

Performance

Voltage	12 V
Capacity	70 Ah (C20)
Cold Cranking Amps (CCA)	760 A (EN)
Charge Acceptance	7 A

Model Information

GBC No.	AGM70L3
ROCKET No.	BAT070AGM
ROCKET EAN Barcode	4260540670026
European Type No. (ETN)	570 901 076

Dimensions

Type	DIN AGM
Box Case	L3
Length (max.)	278 mm
Width (max.)	175 mm
Height (max.)	190 mm

Battery Specifications

Technology	AGM Lead- Acid
Grid	Ca/Ca
Separator	Absorbent Glass Mat
Electrolyte	Diluted sulphuric acid
Electrolyte density	Approx. 1,32 kg/l


Specifications

Layout	0
Terminal	1
Base Hold-down	B13
Total Weight	20,3 Kg ($\pm 5\%$)
Quantity per Pallet	64
Quantity per Layer	16

Box Specifications

Case and Lid Material	Polypropylen (PP)
Handle	Integrated Handle
Lid Type	Valve regulated
Degassing	Central degassing
Flame arrester	Integrated
Indicator (Magic Eye)	No

Drawings

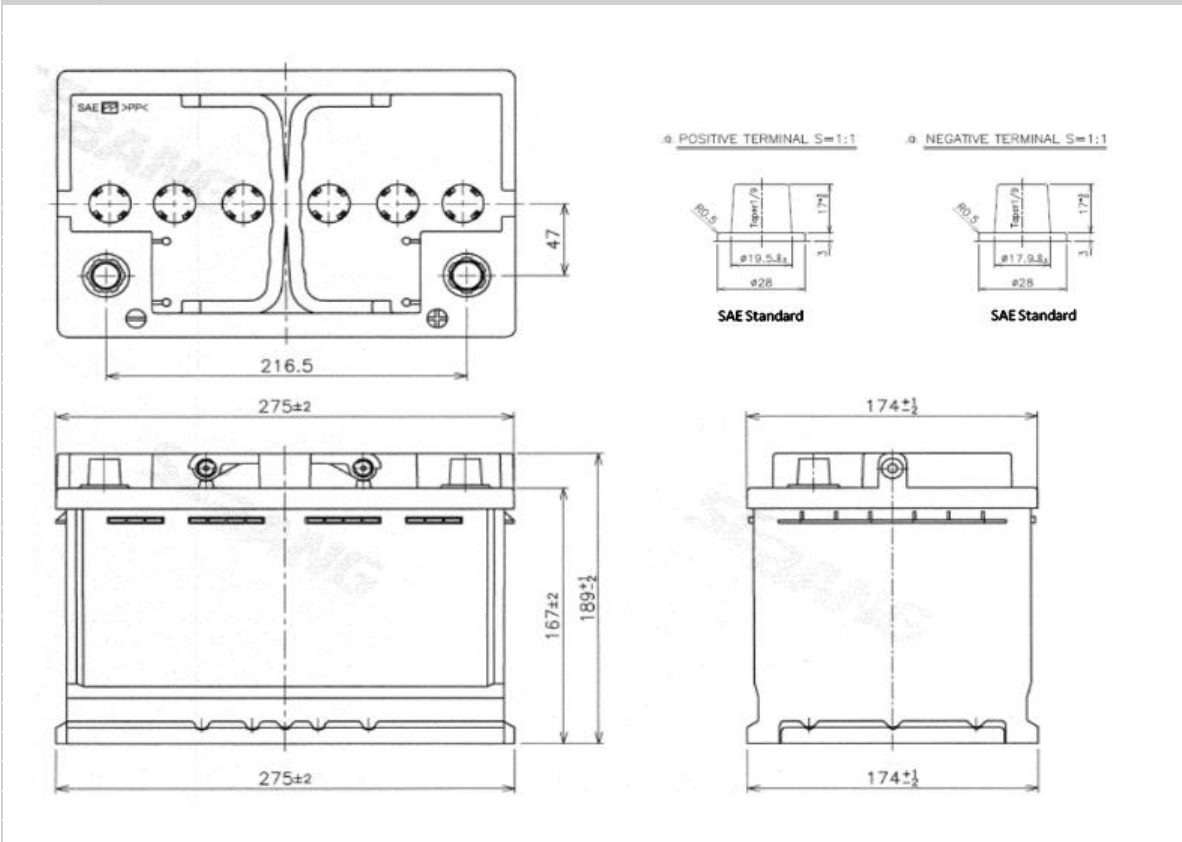

Created: 19.06.2024

Modified and approved: 24.06.2024

This information was prepared by SEBANG Batteries Europe GmbH and is confidential. Specifications are subject to change without notice. It is not allowed to disclose any confidential information to any third parties without the prior written consent of SEBANG Batteries Europe GmbH.